

# PEOPLE ENTRANCE MANAGEMENT SYSTEM

## V-PM1100-TST3 HALF HEIGHT TRIPOD TURNSTILE GATE BARRIER



### FEATURES

Selectable operating modes- single direction, bi-direction, always free or always locked

Heavy-duty design for 24 hours continue application

LED Direction indicators at each side

Ip54 Ingress Protection rating

Automatic reset of barrier gate after each passage

Adjustable time out delay

Integration support with any RFID/Biometric Reader through NO input

Top quality AISI 304 grade SS construction



LED Direction  
Indicators



INGRESS  
PROTECTION  
RATING  
**IP54**



100%  
Duty Cycle



Delay Time



Wired  
Terminal

## TECHNICAL SPECIFICATIONS


### V-PM1100-TST3

Parameter	Specifications
Passage Width	550mm
Throughput Rate	Up to 15 p/m
Power Supply	220~240 V AC
Operational Voltage	24V DC
Max Power Consumption	30W
Frequency	50~60 Hz
Protection Level	IP54
Working Temperature	-25°C~+70°C
Electro-Magnetic Drive	DC
Dimension Excluding Bars	1200x280x960mm
Net Weight Including Bars	50 kg
Certifications	CE, FCC, ROHS

\*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Weights and measurements are approximate and may vary.

## DIMENSIONS

Unit: mm

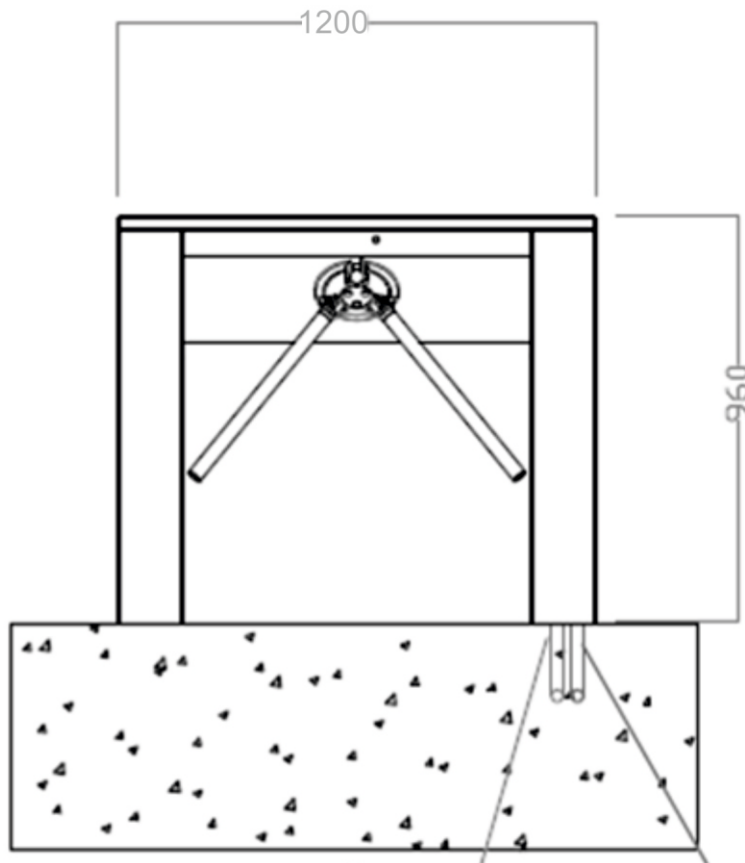

## VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED.

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph: +44-1902-793383, Email: sales@vantagesecurity.com

[www.vantagesecurity.com](http://www.vantagesecurity.com)

(AN ISO9001 : 2008, ISO14001:2004 CERTIFIED COMPANY)

