

PEOPLE ENTRANCE MANAGEMENT SYSTEM

V-PM2100-FTST3 FULL HEIGHT TURNSTILE GATE BARRIER



FEATURES

- Selectable operating modes- single direction, bi-direction, always free or always locked
- Heavy-duty design for 24 hours continue application
- LED Direction indicators at each side
- IP54 Ingress Protection rating
- Automatic reset of barrier gate after each passage
- Adjustable time out delay
- Integration support with any RFID/Biometric Reader through NO input
- Top quality AISI 304 grade SS construction



TECHNICAL SPECIFICATIONS


V-PM2100-FTST3

Parameter	Specifications
Passage width	550mm
Throughput rate	Up to 15 p/m
Power supply	220~240 V AC
Operational voltage	24 V DC
Max power consumption	35W
Frequency	50~60 Hz
Protection level	IP54 (IP56 optional)
Working temperature	-25~+70°C
Electro-magnetic drive	DC
Dimension excluding bars	1400x1200x2250mm
Net weight including bars	150kg
Certifications	CE, FCC, ROHS

*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Weights and measurements are approximate and may vary.

DIMENSIONS

Unit: mm

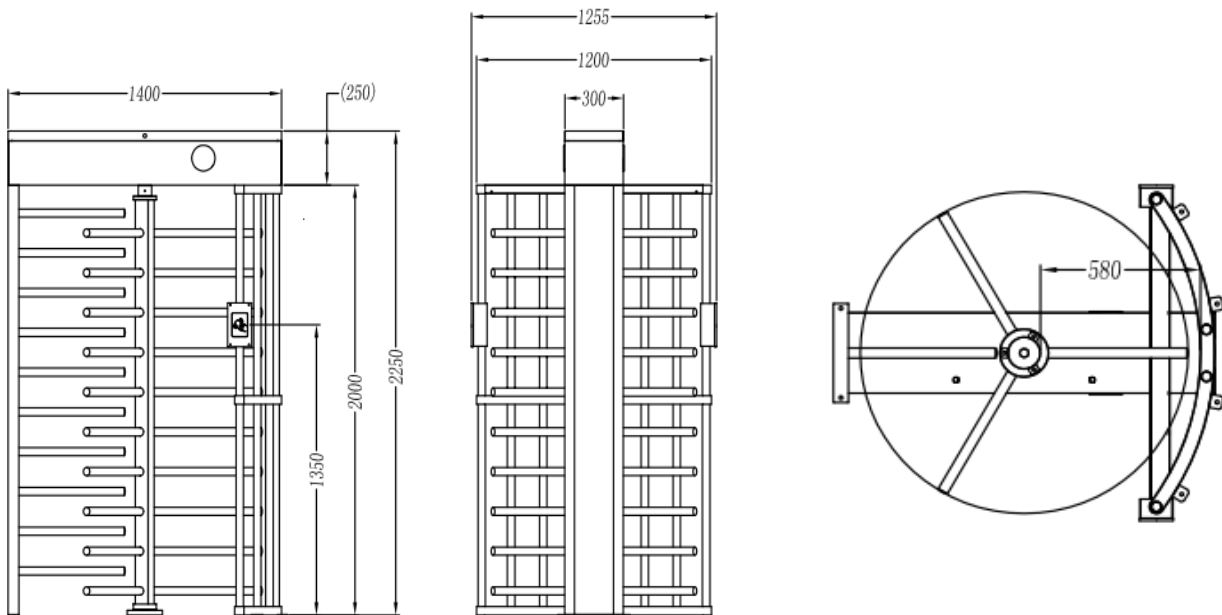

VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED.

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph: +44-1902-793383, Email: sales@vantagesecurity.com

www.vantagesecurity.com

(AN ISO9001 : 2008, ISO14001:2004 CERTIFIED COMPANY)

