




PEOPLE ENTRANCE MANAGEMENT SYSTEM

V-PM4100SC/DC-SGT3 SINGLE/DOUBLE MACHINE CORE SWING GATE

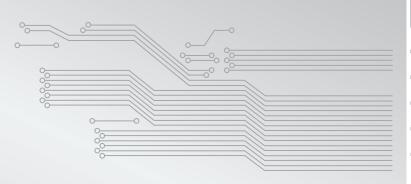

	INGRESS PROTECTION RATING	Heavy Duty	Э	\$
LED Direction Indicators	IP54	100% Duty Cycle	Delay Time	Wired Terminal

FEATURES

Heavy duty stainless steel Swing Gate Barrier

Single/dual core and bi-directional operations supported

Half height operation with passage width of <1100mm

LED status indicator & adjustable time out delay

Automatic reset of barrier gate after each passage

Integration support with any RFID/Biometric Reader through NO input

Fail safe & fail lock function supported in case of emergency Top quality AISI 304 grade SS construction with IP54 rating

CE FC TRons

www.vantagesecurity.com


V-PM4100SC/DC-SGT3


Parameter	Specifications	
Passage Width	Standard 1100mm ; optional 600mm	
Throughput Rate	30-35 persons per minute	
Opening & Closing Speed	0.5~ 0.8s	
Passing Time	5s default (adjustable 0-25s)	
Safety Sensors	5 pairs of infrared sensors for smooth passage traffic and protection of pedestrian	
Passage Direction	Unidirectional/ bidirectional	
Drive	Electro-mechanical DC motor drive	
Power/Mechanism Failure	Fail safe or fail lock status for either one or both directions be in free movement mode (standard) or locks in the home position	
Fire Alarm Integration	Supported to provide free passage for evacuation	
Motor Power	35W (DC motor)	
Service Life	>5 million operation cycles	
Communication Interface	Relay Input (NO/NC/COMM) Optional RS232/RS485	
Operating Voltage	DC 24V	
Power Supply Voltage	AC100~240 V	
Power Consumption	35W	
Working Temperature	-25°C~+70°C	
Relative Humidity	≤ 90% no condensation	
IP Rating	IP54 (IP56 optional)	
Chassis Material	Top quality AISI 304 grade stainless steel (optional 316 grade)	
Door Material	Acrylic	
Dimension	1200x280x960mm	
Net weight	50kg single core, 70kg double core	
Certifications	CE, FCC, ROHS	


*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Product image & weights, measurements are approximate and may vary.

DIMENSIONS

Unit: mm







VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED.

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton West Midlands, WV6 0JZ United Kingdom Ph:+44-1902-793383, Email: sales@vantagesecurity.com www.vantagesecurity.com (AN ISO 9001 : 2008, ISO 14001:2004 CERTIFIED COMPANY)

