


PoE GATEWAY

VP-CS7030AX-PSV2 8 PORT PoE GATEWAY

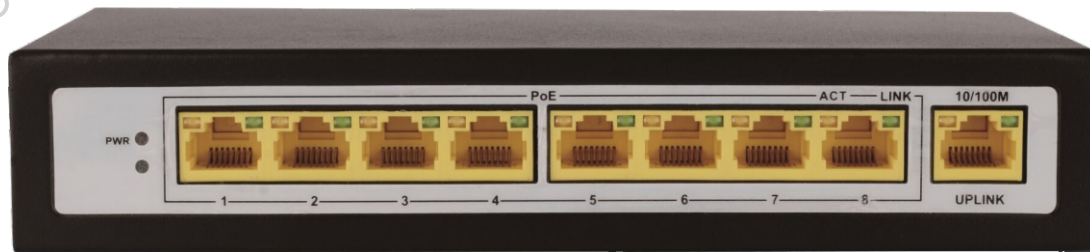

FEATURES

IEEE802.3 / IEEE802.3U Standard

Full duplex IEEE802.3X standard, half duplex back pressure standard

Support Auto MDI / MDIX, plug and play

Automatically maintain the MAC address list, support two-way address learning function

Each port provides independent bandwidth to provide true non blocking transmission


Dynamic LED indicator light

TECHNICAL SPECIFICATIONS

VP-CS7030AX-PSV2

Specification	
Working Voltage	24V
Rated Current	2.5A
Single Port Output Voltage	24V
Single Port Max Output Current	300mA
Dimensions	195x92x37mm
Certifications	CE, FCC, RoHS

*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Weights and measurements are approximate and may vary.



VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph: +44-1902793383, Email: sales@vantagesecurity.com

www.vantagesecurity.com

(AN ISO 9001 : 2008, ISO14001 : 2004 CERTIFIED COMPANY)

