

# ULTRA HIGH DEFINITION 8MP IP PTZ Camera

**VP-NC9798P-AZ25IR6T1**  
IR Night Vision High Speed PTZ Dome Camera



## FEATURES

Ultra High Definition 8MP (3840×2160) resolution

1/2.8" Progressive Scan CMOS Sensor

Inbuilt WDR, 3D DNR, HLC, BLC & OSD functions



Support H.265+/H.265/H.264+/H.264/MJPEG video compression

25x Optical zoom, Accurate and fast focusing

360° endless panning

Inbuilt IR LEDs for 150 mtrs IR range

IP66 Weather proof outdoor enclosure



## TECHNICAL SPECIFICATIONS

### VP-NC9798P-AZ25IR6T1

Camera	Image sensor	1/2.8" Progressive Scan CMOS Sensor
	Signal System	PAL/NTSC
	Effective Pixels	3840 (H) × 2160 (V)
	Minimum Illumination	Color: 0.01Lux @ (F1.65,AGC ON); B/W: 0.002Lux @(F1.65,AGC ON); 0 Lux with IR
	Electronic Shutter Speed	1/1 s - 1/100,000 s
	Signal to Noise	> 55 dB
	Gain Control	Auto / Manual
	White Balance	Auto/Manual//Indoor/Outdoor
	Iris	Auto DC
Lens	Lens Type	4.8mm to 120mm
	Field of View	Horizontal:55° to 2.4°(wide-tele), Vertical: 33° to 1.4°(wide-tele) Diagonal: 61.5° to 2.8°(wide-tele)
	Zoom	25x Optical Zoom
	Zoom Speed	Approx. 3.6s (optical lens, wide-tele)
	Aperture Range	F1.65 ~ F3.8 (wide-tele)
Compression	Video Compression	H.265+/H.265/H.264+/H.264/MJPEG
	H.265 Codec Profile	Main profile
	Video Bit Rate	64 Kbps to 16Mbps
	Audio Compression	G.711 A/U
	Audio Bit Rate	64K bps
Resolution and Frame Rate	Max. Resolution	3840x2160
	Main Stream	50Hz:25fps:3840×2160,2560×1440,1920×1080,1280×960,1280×720, 60Hz:30fps:3840×2160,2560×1440,1920×1080,1280×960,1280×720
	Sub Stream	50Hz: 25fps: (704 × 576, 640 × 480, 352 × 288) 60Hz: 30fps (704 × 480, 640 × 480, 352 × 240)
	Third Stream	50 Hz: 25 fps (1920×1080,1280×960,1280×720,704×576,640×480, 352×288) 60 Hz: 30 fps (1920×1080,1280×960,1280×720, 704×480,640× 480, 352×240)
Day/Night Functionality	Day & Night	True Day & Night with ICR
	IR Cut	High performance Mechanical IR Cut Filter with auto switch
	IR Source	Inbuilt High performance IR LEDs
	IR Range	Up to 150 Mtrs
Pan-Tilt	Pan Angle	360° endless pan rotation
	Tilt Angle	-5° to 90° (Auto Flip)
	Pan Speed	0.1° ~ 200°/s(Manual), 0.1° ~ 240°/s(Preset)
	Tilt Speed	0.1° ~ 200°/s(Manual), 0.1° ~ 240°/s(Preset)
	Presets	360
	Patrol	8 patrols, up to 16 presets per patrol
	Tour Pattern	4 Tour patterns
	Power-off Memory	Supported
	PTZ position display	Supported
	Preset Freezing	Supported
	Scheduled Task	Preset/Cruise/Trace/Random Scan/Boundary Scanning /Dome reboot
	Action mode	Preset/Cruise/Trace/Auto Scan/Random Scan
	Proportional Zoom	Supported
	3D Positioning	Supported

## TECHNICAL SPECIFICATIONS

### VP-NC9798P-AZ25IR6T1

Operational Features	Alarm Linkage	Alarm actions, such as Preset, Cruise, Track, Memory Card Video Record, Trigger Recording, Notify Surveillance Center, Upload to FTP/ Memory Card, Send Email, etc.
	OSD overlay	Max 15 characters/line, 8 lines, white or red font color
	BLC	Supported
	HLC	Supported
	Picture overlay	Logo picture could be overlaid on video with 128x128pixels, 24bits BMP format
	WDR	Supported
	Protocols	PELCO-P, PELCO-D, Multi protocol support
	Privacy Mask	4 areas, up to 4 mask in the same frame
	3D DNR	Auto/Manual
	Codec streaming capability	Triple streaming
	Image settings	Flip, Mirror, Saturation, Brightness, Contrast, Sharpness, AGC, and AWB adjusted by client software/browser
	Security	User authentication (ID and PW), Host authentication (MAC address); HTTPS encryption, IEEE802.1x port-based network access control; IP address filtering
	Onboard Storage	Support Micro SD slot, up to 256 GB
	Basic event	Motion detection, Video tampering alarm, Exception (Network disconnected, IP address conflict, SD full, SD error)
Network & Remote Monitoring	Protocols	HTTP, HTTPS, IPv4/IPv6, 802.1x, QoS, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTCP, RTP, TCP/IP, UDP, IGMP, ICMP, DHCP, PPPoE
	System Compatibility	ONVIF
	CMS	Full function CMS (Central monitoring software)
	User Access	16 users online with professional authority management
	Mobile Client Application	Supports android and iOS APP for Smart phone and tablets
	Bandwidth Control	VBR (Automatic) and CBR (Manual) supported
	User / Host	Up to 16 users, 3 levels: Administrator, Advanced User and Normal User
Smart Analytics	Web Browser	IE8-11
	Smart Features	Tripwire, Bi-directional tripwire, Illegal intrusion detection, Region entrance detection, Region exiting detection, Unattended baggage detection, Object removal detection, Vehicle detecting and tracking
	Face Recognize	Detecting max 15 faces at same scene. Detecting, tracking, capturing
Interface	Smart Tracking	Smart tracking of human or vehicle, auto/manual
	Ethernet	1 RJ45 10M/100M adaptive ethernet
Electrical	Power Requirement	DC12V±25%, 3000mA, PoE+ (802.3.at, class 3)
	Power Consumption	MAX. 24W (include IR ON+PTZ working, Heater on, Fan working)
	Alarm Input/Output	1 alarm input (Dry contact); 1 alarm output
	Audio Input/Output	1 audio input (MIC in); 1 audio output, line level, impedance, 600Ω
Environmental	Enclosure	IP66, 4,000V Lightning Protection, Surge Protection and Voltage Transient Protection
	Impact Protection	IK10 (excluding glass window)
	Operating Temperature	-40°C to +60°C
	Storage Temperature	-40°C to +70°C
	Operating Humidity	90% or less (non-condensing)
Mechanical	Color	White
	Dimensions	Φ 173mm × 247mm
	Weight	Approx. 2.1KG
Certification	Certification	UL, CE, FCC, RoHS


\*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Product image, weights and measurements are approximate and may vary due to customized solutions & products being offered as per customer requirements.

## TECHNICAL SPECIFICATIONS

**VP-NC9798P-AZ25IR6T1**

## DIMENSIONS

Unit: mm

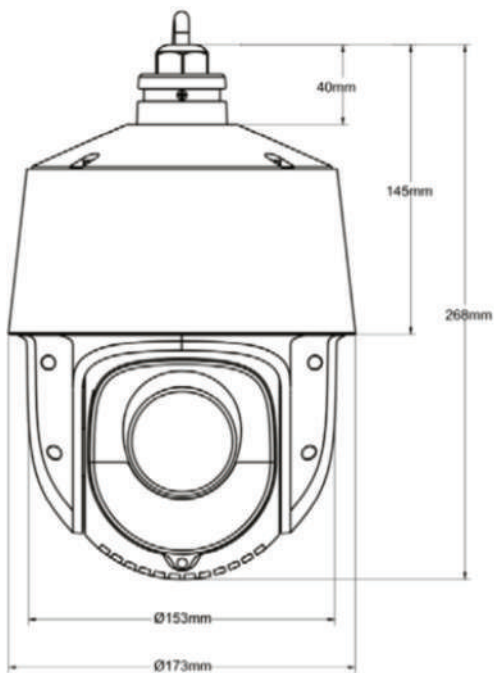

## VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph:+44-1902793383, Email: [sales@vantagesecurity.com](mailto:sales@vantagesecurity.com)

[www.vantagesecurity.com](http://www.vantagesecurity.com)

(AN ISO 9001 : 2008, ISO14001 : 2004 CERTIFIED COMPANY)

