

NETWORK AUTHENTICATION MANAGEMENT SERVER

VV-AS30000-T1



FEATURES

- High-performance X86 hardware platform, stable & reliable
- Support PTZ direction control and focus control; support setting and calling preset and cruise
- Support ONVIF protocol
- Automatically search devices and quickly adding devices
- Support voice monitoring, two-way talk and broadcast
- Support various alarm types and alarm linkages
- Support Android/iOS mobile APP
- Support TV wall management, including splicing, PIP, roaming and triggering video on TV wall

VV-AS30000-T1

System	CPU	Intel Core Processor I3
	OS	Linux
	Memory	8GB DDR4 ECC, up to 64GB
Bandwidth	Incoming Bandwidth	880Mbps
	Outgoing Bandwidth	880Mbps (Live View & Transfer)
Interface	Network Card	Dual gigabit ports I350-T2 + Intel 210-AT dual gigabit Ethernet ports
	HDD	1 built-in Kingston SSD/120G/SATA/6Gb/s/2.5inch
	PCI Expansion	1x PCI- E3, 0x 8; 1x PCI- E3, 0x 8 (X4); 1x PCI- E3, 0x16(X8)
	Interfaces	VGA x1, HDMI x1, USB x 6 (front panel: USB2.0x2, real panel USB3.0x4), DVI x 1, remote management port x 1; audio input x 2; audio output x 2
	Max. Number of Camera Access	30000 CH
	Max. Number of NVR Access	1024 NVRs
	Max. Decoding Capability	256CH
	Max. Number of Transfer Server Access	32 transfer servers
	Device Group	Support
	Max. Number of Users	256 users
Features	Simultaneous Online Users	256 users
	User Permission	Self-define
	Real-time View	Up to 100 CH real-time preview; support auto-switch
	PTZ	Support PTZ control, PTZ permission, PTZ lock, PTZ preset management
	Storage Type	IP SAN/streaming media storage
	Record Type	Schedule, manual and alarm records
	Record Search	Multi-channel synchronous search and playback
General	Noise	Working: <50dBA; 6.2BA (<28°C)
	Power	100~240V-6~3A/50~60Hz
	Power Consumption	≤300(with HDD)
	Working Environment	10°C ~35°C; Standby : -40°C ~+70°C (ambient)
	Humidity	Standby: 95%, 25°C ~ 30°C (non-condensing)
	Installation	Standard 19 inch rack mount
	Dimensions	430 x 487 x 44 (W x D x H)
Certifications	Weight	Approx. 12KG
	Certifications	CE, FCC, RoHS

*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Product image, weights and measurements are approximate and may vary due to customized solutions & products being offered as per customer requirements.

VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph: +44-1902793383, Email: sales@vantagesecurity.com

www.vantagesecurity.com



(AN ISO 9001 : 2008, ISO 14001 : 2004 CERTIFIED COMPANY)



VV-AS30000-T1

Dimension

Unit: mm

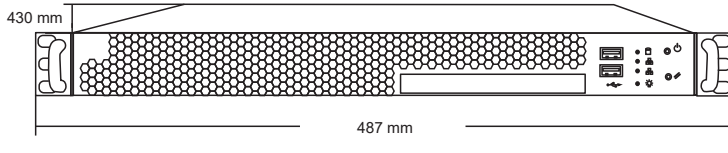

VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph: +44-1902793383, Email: sales@vantagesecurity.com

www.vantagesecurity.com

(AN ISO 9001 : 2008, ISO 14001 : 2004 CERTIFIED COMPANY)

