


ENTRANCE MANAGEMENT SYSTEM

VV-VM7100F-TKZ4 SERIES AUTOMATIC HYDRAULIC TYRE KILLER

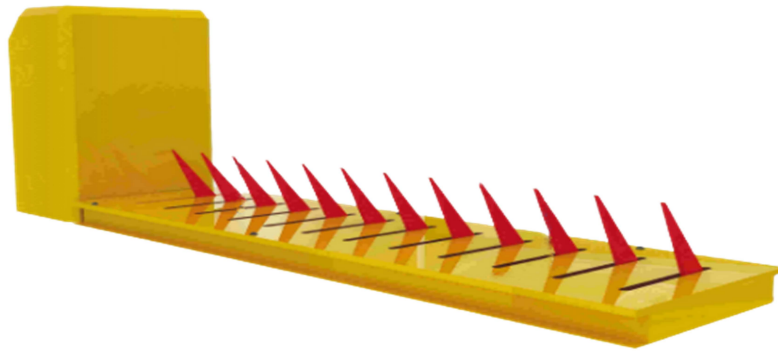

FEATURES

The structure has sturdy and durable, stable speed, low noise advantages, can adapt to a variety of working environment.

Mechanical hydraulic drive, simple installation, easy maintenance, high safety performance, long service life.

1 meter assembly modular to support 3-8 meters length according to requirement

Hydraulic tyre killer can also be operated when power down, does not affect vehicle normal access.

Heavy duty operation to intercept unauthorized vehicles

TECHNICAL SPECIFICATIONS

VV-VM7100F-TKZ4 SERIES

Parameter	Specifications
Material	A3 steel
Surface Treatment	Spray painting
Colors	Yellow and Black, red and yellow, other options are available
Device Length	3mtr, 4mtr, 5mtr, 6mtr, 7mtr, 8mtr (customizable)
Device Width	500(±10)mm
Height	80(±10)mm
Drive Method	Hydraulic
Lifting Time	≤ 1s
Interception Height of Blade	150 (±5)mm
Thickness of Blade	12(1)mm
Load Bearing Capacity	30 tons
Safety Reversal Pressure Switch	Optional
Working Voltage	380/220VAC
Protection Rating	IP68
Working Rated	300W
Operating Humidity	≤95% non-condensing humidity
Working Temperature	-40°C~+70°C
Certifications	CE, FCC, ROHS

*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Weights and measurements are approximate and may vary.

Ordering Info :

Model No	Description
VV-VM7103F-TKZ4	3meter Hydraulic Tyre Killer
VV-VM7104F-TKZ4	4meter Hydraulic Tyre Killer
VV-VM7105F-TKZ4	5meter Hydraulic Tyre Killer
VV-VM7106F-TKZ4	6meter Hydraulic Tyre Killer
VV-VM7108F-TKZ4	8meter Hydraulic Tyre Killer

VANTAGE INTEGRATED SECURITY SOLUTIONS LIMITED.

B3, Bredon House 321, Tenttenhall Road Tettenhall, Wolverhampton

West Midlands, WV6 0JZ United Kingdom

Ph: +44-1902-793383, Email: sales@vantagesecurity.com

www.vantagesecurity.com

(AN ISO 9001 : 2008, ISO 14001 : 2004 CERTIFIED COMPANY)

